## **EM502C**

v. 2011-06-22-DVM-JNT-DVB



\_\_\_\_

EM502C

, , ,

\_\_\_\_\_

\_\_\_\_\_


• ./ .

•

• (° /°F)

• /

:	-50+300°
· ·	0,1° – –50+200°
•	1,0° - +200+300°
:	±1° - 0+80°
·	±510° –
:	2 c
	160
:	: -10+50°
·	: <75%
:	2 1,5
:	320 92 25
:	155 ( )

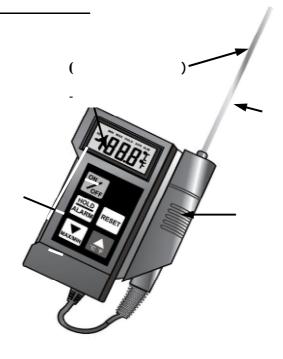



- 1. MIN -
- 2. MAX -
- 3. HOLD -
- 4. APO -
- 5. ALM -
- 6. °C -
- 7. °F –
- 8. HI -

**9.** -- (

ON/OFF 2 , : 1. 2. 3. (° ). (°F) p° /°**F**. : 1. q MAX/MIN. «MIN»). q MAX/MIN 2. «MAX»). 3. q MAX/MIN 10 . RESET 1. **ON/OFF** 2. «APO»). ( 8 3. ON/OFF, q MAX/MIN.

4

```
4.
                                       :
                                                                HOLD/
ALARM,
                              «HOLD»).
                              HOLD/ALARM
                                             :
    1.
       HOLD/ALARM
                                 2,
                                                               \llALM\gg).
                      HOLD/ALARM
                                      «ALM»
    2.
                                                           p° /°F,
                    q MAX/MIN.
       -+301°,
                             -51^{\circ} ,
                                                            : +300^{\circ} .
    3.
          (
                                              2
       «HI»).
                             RESET
                      0,1...1\mu A).
              10...40
                                                                      ).
(
```

5

\_\_\_\_\_

,

:\_\_\_\_\_